

CI-825TN

Ref: 590.004.007


EN 54 -24

The **CI-825TN** is an EN 54-24 certified, 40W column loudspeaker. It provides a broad frequency response range, low distortion and high sound pressure levels for accurate, intelligible broadcast of evacuation messages and high quality sound reproduction.

It is suitable for both indoor and outdoor thanks to its IP 66 protection, which makes it perfect for most types of environments.

Features of the CI-825TN speaker:

- EN 54-24 certified
- Intelligible voice and excellent sound reproduction
- Robust aluminium housing
- Includes universal swivel bracket for easy angle adjustment
- Able to be switched between 100V and 70V
- Adaptable to extreme environments
- IP66 protection

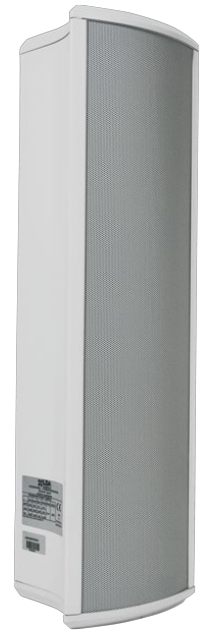

Technical Specifications:



Model	CI-825TN
Max power	60 W
Rated power	40 W
Transformer	40 / 20 / 10 / 5W @ 100V, 20 / 10 / 5 / 2,5W @ 70V
SPL at 20W/1W (100Hz-10kHz, 1m)	108 dB (20W/1m) / 94 dB (1W/1m)
Frequency response	300 Hz ~15 kHz (-10 dB)
Connection	Fire-resistant cable
Dimensions (W x H x D)	165 x 568 x 150 mm
Weight	5.75 kg
Colour	White (RAL9003)
IP protection grade	IP66 (B type according to EN54-24)
Speaker size	4 x 4
Material	Aluminium

CI-825TN

Ref: 590.004.007

EN 54 -24

Frequency response and polar diagram:

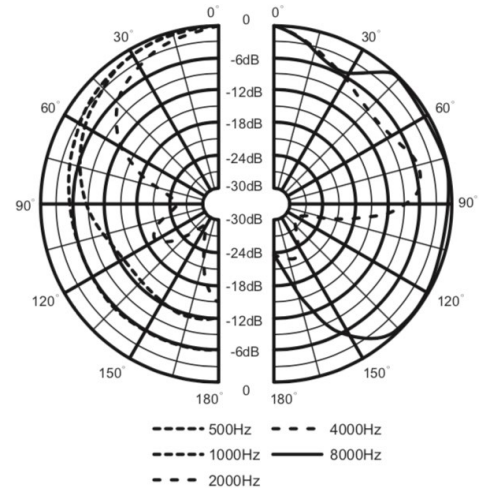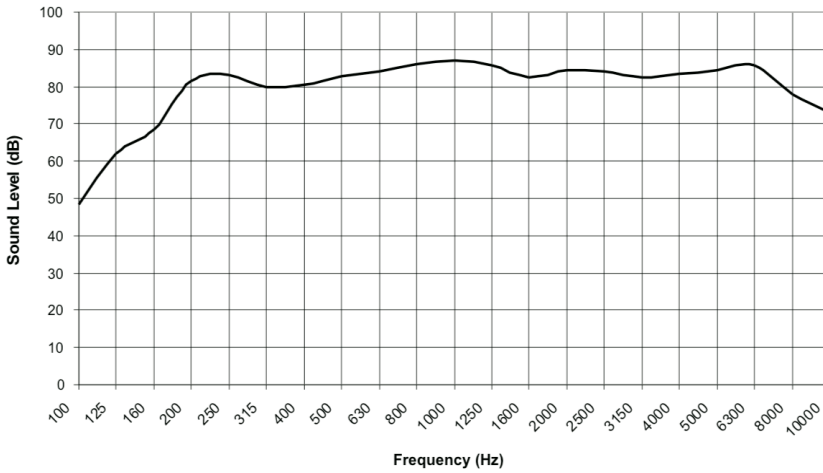

Mechanical details:

