

# COLUMN LOUDSPEAKER

## **CI-225TN**

Ref: 590.004.008

**EN 54-24**

The **CI-225TN** is an EN 54-24 certified 20W column loudspeaker. It provides a broad frequency response range, low distortion and high sound pressure levels for accurate and intelligible broadcast of evacuation messages and high quality sound reproduction.

It is suitable for both indoor and outdoor thanks to its IP 66 protection, which makes it ideal for most types of environments.

### Features of the CI-225TN speaker:

- EN 54-24 certified
- Intelligible voice and excellent sound reproduction
- Robust aluminium housing
- Includes universal swivel bracket for easy angle adjustment
- Able to be switched between 100V and 70V
- Designed for use in extreme environments
- IP66 protection



### Technical Specifications:

Model	CI-225TN
Max power	30 W
Rated power	20 W
Transformer	20 / 10 / 5 / 2,5W @ 100V, 10 / 5 / 2,5 / 1,25W @ 70V
SPL at 20W/1W (100Hz-10kHz, 1m)	103 dB (20W/1m) / 92 dB (1W/1m)
Frequency response	300 Hz ~15 kHz (-10 dB)
Connection	Fire-resistant cable
Dimensions (W x H x D)	165 x 150 x 344 mm
Weight	3.75 kg
Colour	White (RAL9003)
IP protection grade	IP66 (B type according to EN54-24)
Speaker size	4 x 2
Material	Aluminium



# COLUMN LOUDSPEAKER

## CI-225TN

Ref: 590.004.008

**EN 54 -24**

### Frequency response and polar diagram:

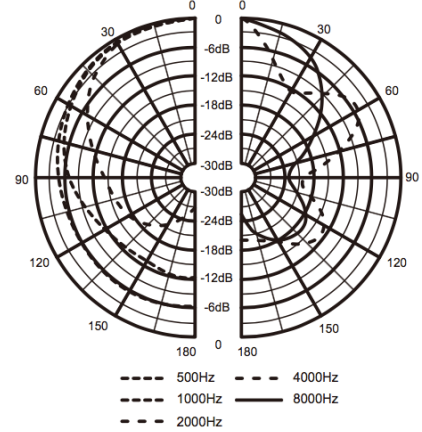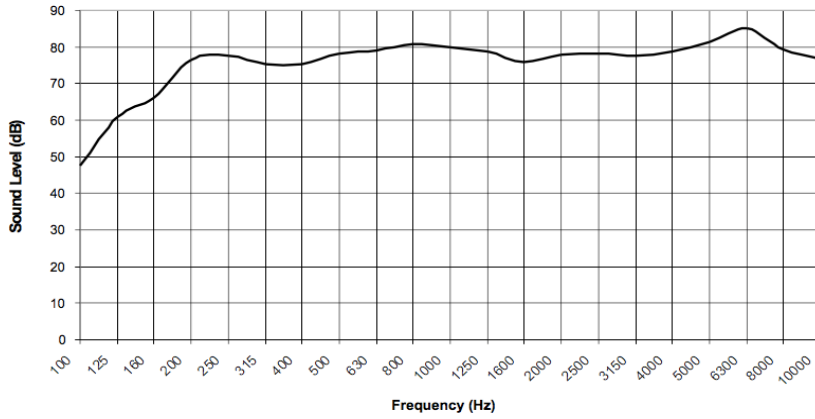

### Mechanical details:

