

# Aspirating Smoke Detector

## TITANUS MICRO-SENS®

### ROOM-IDENT Version with Pre-alarm

#### TITANUS® aspirating smoke detector

The TITANUS® family of aspirating smoke detectors covers standard to very early warning fire detection as well as a wide range of extreme applications without compromising high levels of sensitivity and performance. Coverage up to 400m<sup>2</sup>.



#### Technology

TITANUS MICRO-SENS® aspirating smoke detection system combines High-Power-Light-Source (HPLS) technology with patented LOGIC-SENS® fire pattern recognition algorithms and a large portfolio of custom accessories to ensure that each system will maintain high levels of sensitivity and false alarm immunity even in challenging environments. TITANUS MICRO-SENS® enables adapted and cost-effective solutions for a wide range of applications. It comes with dry contacts for connection to any fire panel.

#### Advantages

- Individual smoke indication for up to 5 separate enclosures or rooms using one straight pipe run.
- High reliability and extended service life due to physical separation of disturbing influences such as dust, vapour or radiation from the measuring chamber
- Pre-alarm for tiered alerting
- Optional bar graph smoke level display
- TITANUS PipeXpress® software for highly reliable ASD planning with just a few mouse clicks.
- Time-saving installation and commissioning thanks to plug & play philosophy.
- Discreet installation for maintaining aesthetics and providing safety against vandalism.
- Cost-optimized: Only as much technology as necessary, to be expanded and customized
- Intelligent diagnostics tool gives support at inspection and service.

#### Features

- Max. main alarm sensitivity 0.1% obsc./m
- With individual identification for up to 5 rooms
- Up to 40m pipe length and up to 5 aspirating holes
- Operating temperature: -20°C bis +60°C
- With display of the fire location and optional bargraph smoke level display
- PIPE-GUARD patented airflow monitoring system, sensing changes in total airflow as little as +/-10%
- Dry contacts for connection to any fire panel
- Optional Ethernet (TCP/IP)/SNMP/data logger
- Designed for harsh environments, with a wide range of accessories for special applications
- Also available as TITANUS MICRO-SENS® standard and cold storage version

#### Approvals




G 216069

Versions DM-TMV-R(-B)-xx-U available, approved according to UL, ULC, GL and LR. Further information: see corresponding data sheet.

Further approvals on request and at [www.wagnergroup.com](http://www.wagnergroup.com)

# Aspirating Smoke Detector | TITANUS MICRO-SENS® ROOM-IDENT Version

## TITANUS MICRO-SENS® | Components

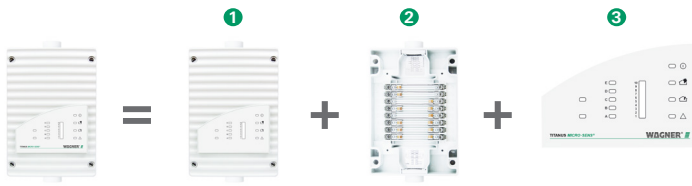

The aspirating smoke detector consists of the detection unit (1), a device base (2) and an adhesive front film sheet (3).

TITANUS MICRO-SENS®		TITANUS MICRO-SENS® High Sensitivity	TITANUS MICRO-SENS® Normal Sensitivity
System			
<b>1 Basic device</b>			
Type ("B" is bar graph option)		<b>DM-TMV-R(B)-10</b>	<b>DM-TMV-R(B)-50</b>
Max. main alarm sensitivity		0.10% obsc./m	0.50% obsc./m
No. of pipe connections		1 aspiration pipe plus 1 air return	
Max. number of aspiration holes		5	
Max. area of coverage		400 m <sup>2</sup>	
Max. pipe length (d <sub>0</sub> = 25 mm)		40 m straight pipe run	
Double-knock alarm verification		no	
Alarm levels		2	
Supply voltage		24 VDC (16 to 30 VDC) according to EN 54-4	
Front indicators		alarm, pre-alarm, fire location (A...E), fault, operation DM-TMV-RB-10/-RB-50 with additional smoke level display	
Current consumption <sup>1</sup>	Operational	105 mA	
	without bar graph Alarm	110 mA	
	with bar graph Operational	140 mA	
Operating temperature		-20 °C to +60 °C	
Sound pressure level		as low as 40 dB(A)	
Weight (basic configuration)		0.43 kg	
Humidity range		10% to 95% (noncondensing)	
Dimensions		222 x 140 x 70 mm	
Material and colour		ABS, papyrus white (RAL 9018)	
Cable entries		6 x M20 and 8 x M25	
Terminal connections		max. 1.5 mm <sup>2</sup>	
IP rating		IP 54	
No. of Output Relays (1 A/30 VDC)		2 (alarm: n.o.; fault: n.c.), additional relays optional <sup>2</sup>	
Contact load, max.		1 A, 30 V, max. 24 W	
<b>2 Device basis</b>			
	Type	<b>HB-TM</b>	
	Weight	0.42 kg	
<b>3 Adhesive front film sheets</b>			
	Type for devices without bar graph	<b>FW-TMV-R</b>	
	Type for devices with bar graph	<b>FW-TMV-RB</b>	

<sup>1</sup> At 9V standard fan voltage, 24V DC supply voltage

<sup>2</sup> Relay boards providing 5 additional relays each: RU-1 for ROOM IDENT, RU-2 for alarm transmission (external housing required)