

Aspirating Smoke Detector

TITANUS MICRO-SENS®

ROOM-IDENT Version

TITANUS® aspirating smoke detector

The TITANUS® family of aspirating smoke detectors covers standard to very early warning fire detection as well as a wide range of extreme applications without compromising high levels of sensitivity and performance. With individual smoke identification for up to five rooms.



Technology

TITANUS MICRO-SENS® aspirating smoke detection system combines High-Power-Light-Source (HPLS) technology with patented LOGIC-SENS® fire pattern recognition algorithms and a large portfolio of custom accessories to ensure that each system will maintain high levels of sensitivity and false alarm immunity even in challenging environments. TITANUS MICRO-SENS® enables adapted and cost-effective solutions for a wide range of applications. It comes with dry contacts for connection to any fire panel.

Advantages

- Individual smoke indication for up to 5 separate enclosures or rooms using one straight pipe run.
- High reliability and extended service life due to physical separation of disturbing influences such as dust, vapour or radiation from the measuring chamber.
- Optional bar graph smoke level display
- TITANUS PipeXpress® software for highly reliable ASD planning with just a few mouse clicks.
- Time-saving installation and commissioning thanks to plug & play philosophy.
- Discreet installation for maintaining aesthetics and providing safety against vandalism.
- Cost-optimized: Only as much technology as necessary, to be expanded and customized
- Intelligent diagnostics tool gives support at inspection and service.

Features

- Max. main alarm sensitivity 0.1% obsc./m
- Coverage up to 400 m²
- Up to 40m pipe length and up to 5 aspirating holes
- Operating temperature: -20°C bis +60°C
- With display of the fire location and optional bar graph smoke level display
- PIPE-GUARD patented airflow monitoring system, sensing changes in total airflow as little as +/-10%
- Dry contacts for connection to any fire panel
- Optional Ethernet (TCP/IP)/SNMP/data logger
- Designed for harsh environments, with a wide range of accessories for special applications
- Also available as TITANUS MICRO-SENS® standard and cold storage version

Approvals




G 216069

Versions DM-TM-R(-B)-xx-U available, approved according to UL, ULC, GL and LR. Further information: see corresponding data sheet.

Further approvals on request and at www.wagnergroup.com

Aspirating Smoke Detector | TITANUS MICRO-SENS® ROOM-IDENT Version

TITANUS MICRO-SENS® | Components

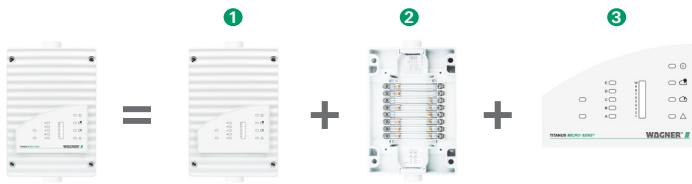

The aspirating smoke detector consists of the detection unit (1), a device base (2) and an adhesive front film sheet (3).

TITANUS MICRO-SENS®		TITANUS MICRO-SENS® High Sensitivity	TITANUS MICRO-SENS® Normal Sensitivity
System			
1 Basic Device			
Type ("B" is bar graph option)		DM-TM-R(B)-10	DM-TM-R(B)-50
Max. main alarm sensitivity		0.10% obsc./m	0.50% obsc./m
No. of pipe connections		1 aspiration pipe plus 1 air return	
Max. number of aspiration holes		5	
Max. area of coverage		400 m ²	
Max. pipe length (d ₀ = 25 mm)		40 m straight pipe run	
Double-knock alarm verification		no	
Alarm levels		1	
Supply voltage		24 VDC (16 to 30 VDC) according to EN 54-4	
Front indicators		alarm, fire location (A...E), fault, operation DM-TM-RB-10/-RB-50 with additional smoke level display	
Current consumption ¹	Operational	105 mA	
	without bar graph Alarm	110 mA	
	with bar graph Operational	140 mA	
Operating temperature		-20 °C to +60 °C	
Sound pressure level		as low as 40 dB(A)	
Weight (basic configuration)		0.43 kg	
Humidity range		10% to 95% (noncondensing)	
Dimensions		222 x 140 x 70 mm	
Material and colour		ABS, papyrus white (RAL 9018)	
Cable entries		6 x M20 and 8 x M25	
Terminal connections		max. 1.5 mm ²	
IP rating		IP 54	
No. of Output Relays (1 A/30 VDC)		2 (alarm: n.o.; fault: n.c.), additional relays optional ²	
Contact load, max.		1 A, 30 V, max. 24 W	
2 Device basis			
	Type	HB-TM	
	Weight	0.42 kg	
3 Adhesive front film sheets			
	Type for devices without bar graph	FW-TM-R	
	Type for devices with bar graph	FW-TM-RB	

¹ At 9V standard fan voltage, 24VDC supply voltage

² Relay board RU-2 providing 5 additional relays for ROOM-IDENT (external housing required)