


TYPE: KL01EZS	4 wire UTP PVC-Eca2x24AWG+2x20AWG(2x0.5mm+2x0.8mm)
----------------------	-----------------------------------------------------------

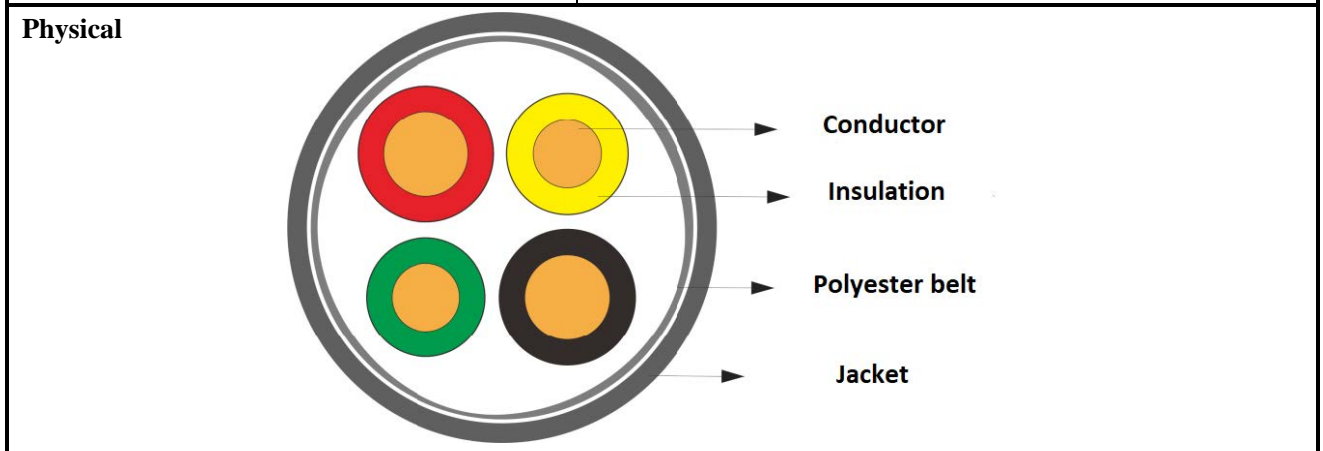

Wire & Cable Construction		Physical Properties		
Conductor 1	Material: solid bare copper	Test Object Item	Insulation	Jacket
	Diameter: $0.50 \pm 0.008\text{mm}$ /24AWG			
	Insulation Color: YE, GN	Tensile strength	$\geq 10\text{N/mm}^2$	$\geq 10\text{N/mm}^2$
Insulation 2	Material: PVC			
	Diameter: $1.0 \pm 0.01\text{mm}$			
Conductor 2	Material: solid bare copper	Electrical Properties		
	Diameter: $0.80 \pm 0.008\text{mm}$ /20AWG			
	Insulation Color: RD, BK,			
Insulation 2	Material: PVC	Test Object Item	Electrical Characteristics	
	Diameter: $1.45 \pm 0.01\text{mm}$			
Polyester belt: $18 \times 0.025\text{mm}$		Rated Temperature	20°C	
Jacket	Material: PVC	Rated voltage	300/300V	
	Diameter: $4.4 \pm 0.2\text{mm}$			
	Thickness: $0.7 \pm 0.05\text{mm}$			
Jacket Color		Max.Cond.Resistance	0.5mm	$\leq 92 \Omega/\text{KM}$
			0.8mm	$\leq 36 \Omega/\text{KM}$
WHITE		Dielectric strength	AC.1500V,5min no breakdown	
Marking		Packing		
according with cusotmer requirement		500M/Box		