

# DELK 130/20 PP1

## 5" 20W CEILING MOUNT PENDANT LOUDSPEAKER

The DELK 130/20 PP1 spherical pendant loudspeaker for voice evacuation systems is a 20W loudspeaker, it is ideal for installations in extensive environments with high ceilings, such as warehouses, shopping malls, airports and railway stations for the reproduction of music and voice announcements.

The device is housed in a powder-paint coated steel enclosure, the ceiling installation box contains a ceramic terminal block, thermal fuse, and a 5m long cable.

EN54-24 certified.



### — TECHNICAL SPECIFICATIONS

#### Main features

- 5" speaker
- Suitable for 70V or 100V lines
- Equipped with internal transformer for adapting the power parameters
- Ceiling mount
- Internal selector to adjust the output power to 20 / 15 / 10 / 5 W
- White colour
- Ceramic connection terminal
- Thermal protection fuse included
- EN54-24 certified

#### Electrical specifications


Power (PHC)	20 / 15 / 10 / 5 W (internal selector)
SPL (Sound Pressure Level)	85 dB (1W @ 1m)
Frequency response	205 Hz – 18.800 KHz (-10 dB)
Operating voltage	70 – 100 Vrms

#### Mechanical specifications

IP protection grade (according to EN54-24 / IP Rating)	32
Enclosure material	Steel
Dimensions	Ø 180 mm
Weight	2.8 Kg
Colour	White RAL 9010
Mounting type	ceiling mount



## Dimensions

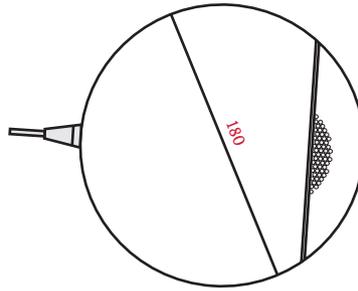

## — ORDER CODE

**DELK 130/20 PP1** 5" 20W ceiling mount pendant loudspeaker

**inim**<sup>®</sup>

Centobuchi, via Dei Lavoratori 10  
63076, Monteprandone (AP), ITALY  
Tel. +39 0735 705007 \_ Fax +39 0735 704912

info@inim.biz \_ [www.inim.biz](http://www.inim.biz)

Inim distributor's stamp  
and signature