

# DAW 130/10 PP

## 5" 10W WALL OR CEILING MOUNT TWO-WAY LOUDSPEAKER

The DAW 130/10 PP loudspeaker for voice evacuation systems is a 10W waterproof loudspeaker suitable for installation both indoors (in places such as corridors) and outdoors (in places such as sports fields).

Its powder-paint coated aluminum enclosure guarantees high resistance to corrosion.

Installation is made easy by a bracket for the adjustment of the device angle.

EN54-24 certified.



### — TECHNICAL SPECIFICATIONS

#### Main features

- 5" speaker
- Suitable for 70V or 100V lines
- Equipped with internal transformer for adapting the power parameters
- Wall or ceiling mount
- Internal selector to adjust the output power to 1.5 / 3 / 6 / 10 W
- White colour
- Ceramic connection terminal
- Thermal protection fuse included
- EN54-24 certified

#### Electrical specifications


Power (PHC)	1.5 / 3 / 6 / 10 W (internal selector)
SPL (Sound Pressure Level)	85 dB (1W @ 1m)
Frequency response	95 Hz – 18.7 KHz (-10 dB)
Operating voltage	70 – 100 Vrms

#### Mechanical specifications

IP protection grade (according to EN54-24 / IP Rating)	33C/54
Enclosure material	Aluminium
Dimensions	Ø 140 x 165 mm
Weight	2.8 Kg
Colour	White RAL 9010
Mounting type	Wall, ceiling



## Dimensions

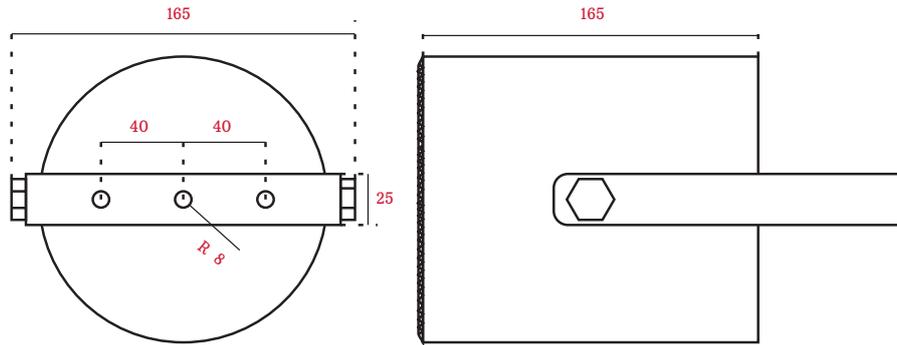

## — ORDER CODE

**DAW 130/10 PP** 5" 10W wall or ceiling mount loudspeaker

**inim**<sup>®</sup>

Centobuchi, via Dei Lavoratori 10  
63076, Monteprandone (AP), ITALY  
Tel. +39 0735 705007 \_ Fax +39 0735 704912

info@inim.biz \_ [www.inim.biz](http://www.inim.biz)

Inim distributor's stamp  
and signature