


DA-P 10-260/T-EN54

10W WALL OR CEILING MOUNT TWO-WAY LOUDSPEAKER

The DA-P 10-260/T-EN54 loudspeaker for voice evacuation systems is an EN54-24 certified 10W two-way loudspeaker. Suitable for outdoor installations, the acoustic projector reproduces voice announcements and background music with optimum sound quality. Installation is made easy by a bracket for the adjustment of the device angle. EN54-24 certified.

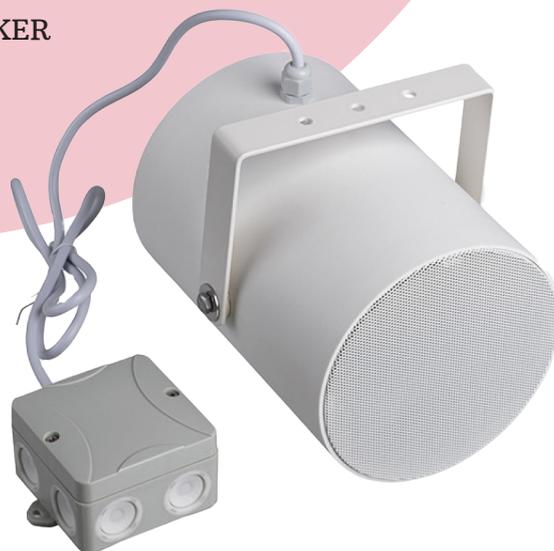

— TECHNICAL SPECIFICATIONS

Main features

- 5" speaker
- Suitable for 70V or 100V lines
- Equipped with internal transformer for adapting the power parameters
- Wall or ceiling mount
- Internal selector to adjust the output power to 10 / 5 / 2.5 W
- White colour
- Ceramic connection terminal
- Thermal protection fuse included
- EN54-24 certified

Electrical specifications


| | |
|----------------------------|------------------------------------|
| Power (PHC) | 10 / 5 / 2.5 W (internal selector) |
| SPL (Sound Pressure Level) | 90.7 dB (1W @ 1m) |
| Frequency response | 100 Hz – 20.000 KHz (-10 dB) |
| Operating voltage | 70 – 100 Vrms |

Mechanical specifications


| | |
|---------------------|----------------|
| IP protection grade | 56 |
| Enclosure material | ABS |
| Dimensions | Ø 146 x 202 mm |
| Weight | 1.82 Kg |
| Colour | White RAL 9010 |
| Mounting type | Wall, ceiling |



Dimensions

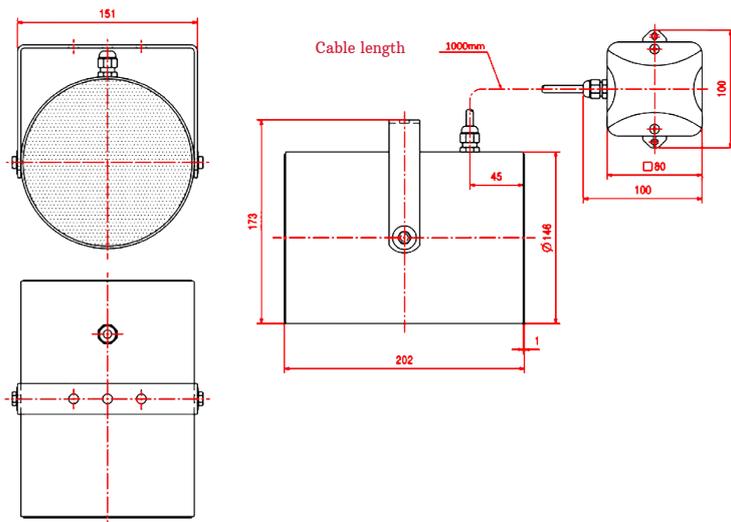

Diagrams

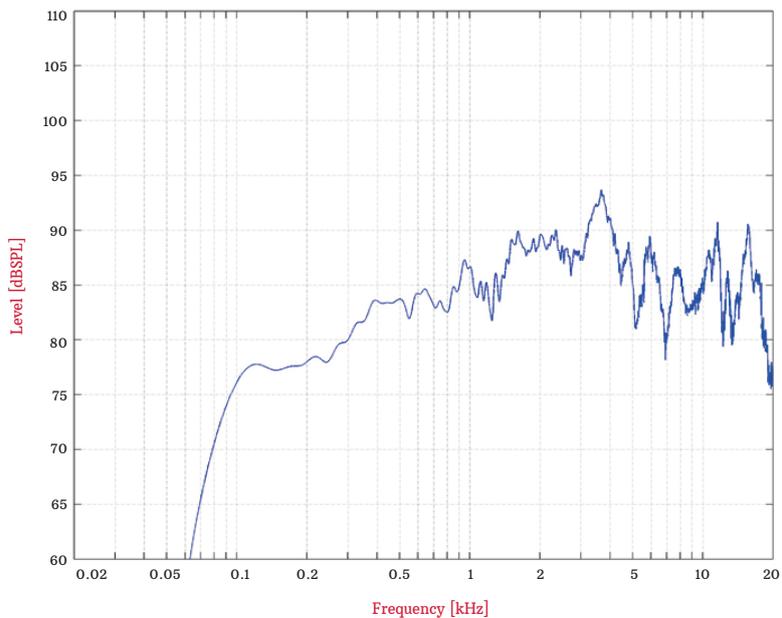

— ORDER CODE

DA-P 10-260/T-EN54 10W wall or ceiling mount two-way loudspeaker, certified EN54-24



Centobuchi, via Dei Lavoratori 10
63076, Monteprandone (AP), ITALY
Tel. +39 0735 705007 _ Fax +39 0735 704912

info@inim.biz _ www.inim.biz

Inim distributor's stamp
and signature