

MS 15-100/T-EN54

15W WALL MOUNT SOUNDBOX

The MS 15-100/T-EN54 soundbox for 15W voice evacuation systems is EN54-24 certified and is the ideal sound diffuser for those installations where high sound quality is required.

It is equipped with a two-way system and an impedance matching transformer which allow compatability with 100 Vrms lines with three power settings. 8 ohms low impedance connection also available.

Its structure in ABS is resistant to ultraviolet rays making it highly robust and reliable, the IP65 protection grade makes it immune to environmental influences, such as sudden changes in temperature and humidity levels.



— TECHNICAL SPECIFICATIONS

Main features

- 15W soundbox
- Suitable for 70V or 100V lines
- Equipped with internal transformer for adapting the power parameters
- Wall mounting
- Internal selector to adjust the output power to 15 / 7.5 / 3.75 / 1.8 (8 ohm) W
- White colour
- Ceramic connection terminal
- Thermal protection fuse included
- EN54-24 certified

Electrical specifications


Power (PHC)	15 / 7.5 / 3.75 / 1.8 (8 ohm) W (internal selector)
SPL (Sound Pressure Level)	81 dB (1W @ 1m)
Frequency response	55 Hz – 24.000 KHz (-10 dB)
Operating voltage	70 – 100 Vrms

Mechanical specifications


IP protection grade	65
Enclosure material	ABS
Dimensions	210 x 130 x 120 mm
Weight	1.75 Kg
Colour	White
Mounting type	Wall mount



Dimensions

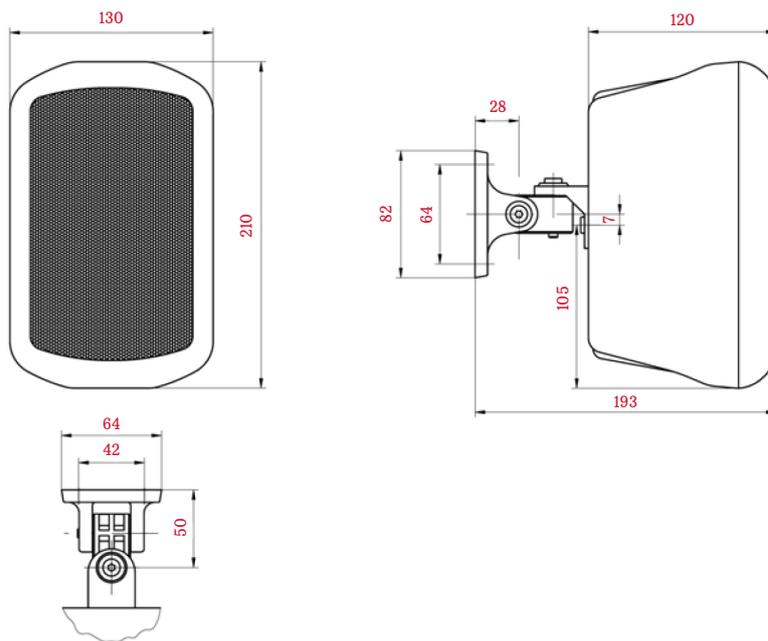

Diagrams

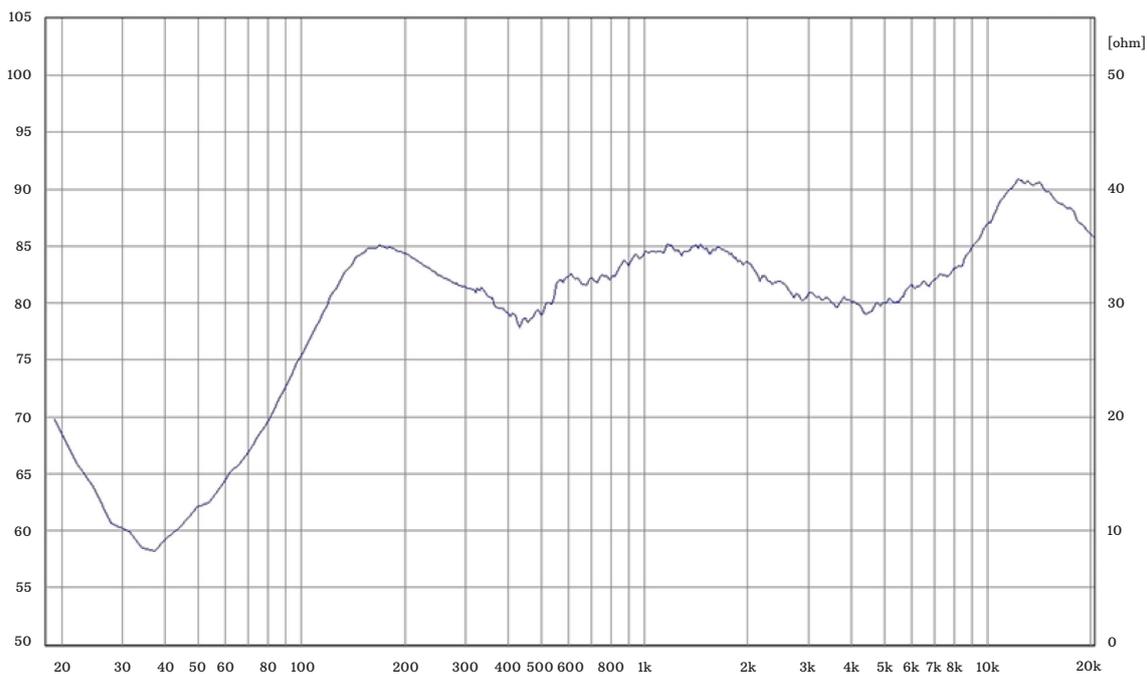

— ORDER CODE

MS 15-100/T-EN54 15W wall mount soundbox, certified EN54-24



Centobuchi, via Dei Lavoratori 10
63076, Monteprandone (AP), ITALY
Tel. +39 0735 705007 _ Fax +39 0735 704912

info@inim.biz _ www.inim.biz

Inim distributor's stamp
and signature