

MS 30-130/T-EN54

30W WALL MOUNT SOUNDBOX

The MS 30-130/T-EN54 soundbox for 30W voice evacuation systems is EN54-24 certified and is the ideal sound diffuser for those installations where high sound quality is required.

It is equipped with a two-way system and an impedance matching transformer which allow compatability with 100 Vrms lines with three power settings. 8 ohms low impedance connection also available.

Its structure in ABS is resistant to ultraviolet rays making it highly robust and reliable, the IP65 protection grade makes it immune to environmental influences, such as sudden changes in temperature and humidity levels.



— TECHNICAL SPECIFICATIONS

Main features

- 30W soundbox
- Suitable for 70V or 100V lines
- Equipped with internal transformer for adapting the power parameters
- Wall mounting
- Internal selector to adjust the output power to 30 / 15 / 7.5 / 2.5 (8 ohm) W
- White colour
- Ceramic connection terminal
- Thermal protection fuse included
- EN54-24 certified

Electrical specifications


Power (PHC)	30 / 15 / 7.5 / 2.5 (8 ohm) W (internal selector)
SPL (Sound Pressure Level)	86 dB (1W @ 1m)
Frequency response	50 Hz – 25.000 KHz (-10 dB)
Operating voltage	70 – 100 Vrms

Mechanical specifications


IP protection grade	65
Enclosure material	ABS
Dimensions	260 x 160 x 152 mm
Weight	2.50 Kg
Colour	White
Mounting type	Wall mount



Dimensions

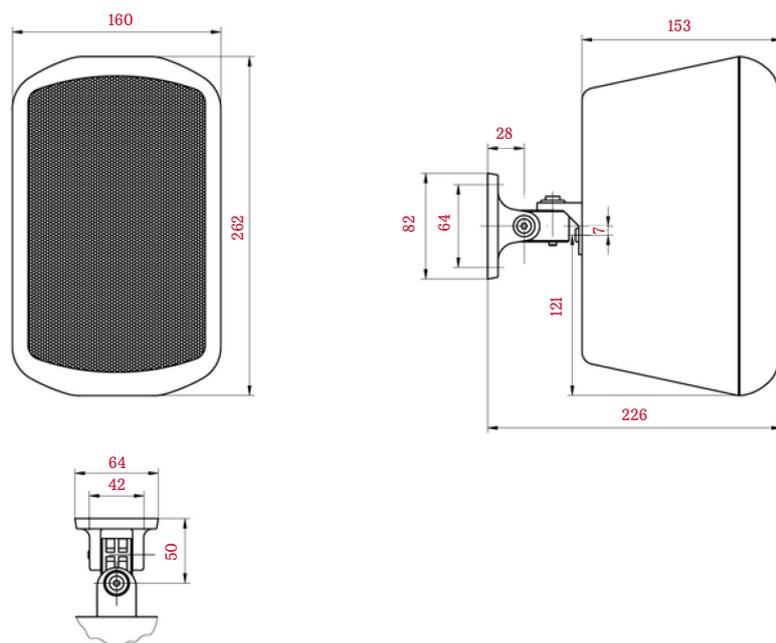

Diagrams

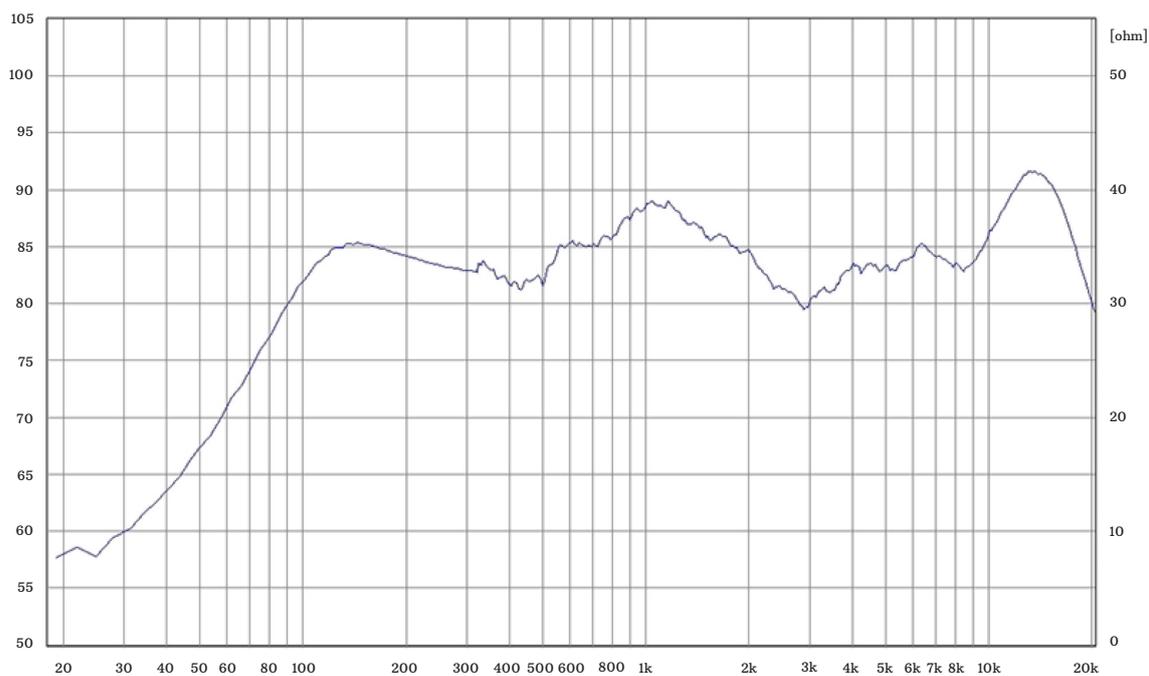

— ORDER CODE

MS 30-130/T-EN54 30W wall mount soundbox, certified EN54-24



Centobuchi, via Dei Lavoratori 10
63076, Monteprandone (AP), ITALY
Tel. +39 0735 705007 _ Fax +39 0735 704912

info@inim.biz _ www.inim.biz

Inim distributor's stamp
and signature