

# WAC 165/6 PP1

## 6.5" 6W WALL-MOUNT LOUDSPEAKER

The distinguishing feature of the WAC 165/6 PP1 loudspeaker for voice evacuation systems is its elegant design (rectangular shape).

Wall mounting this device offers the possibility of positioning it both horizontally and vertically.

This 6W loudspeaker guarantees high quality reproduction of voice announcements and background music and is suitable for installation in places such as conference rooms, shops, hotels, offices, as well as museums and restaurants.

EN54-24 certified.



### — TECHNICAL SPECIFICATIONS

#### Main features

- 6.5" speaker
- Suitable for 70V or 100V lines
- Equipped with internal transformer for adapting the power parameters
- Wall mounting
- Internal selector to adjust the output power to 6 / 3 / 1.5 / 0.75 W
- White colour
- Ceramic connection terminal
- Thermal protection fuse included
- EN54-24 certified

#### Electrical specifications


|                            |  |
|----------------------------|--|
| Power (PHC)                | 6 / 3 / 1.5 / 0.75 W (internal selector) |
| SPL (Sound Pressure Level) | 96 dB (1W @ 1m)                          |
| Frequency response         | 145 Hz – 19.000 KHz (-10 dB)             |
| Operating voltage          | 70 – 100 Vrms                            |

#### Mechanical specifications

|  |                   |
|--|-------------------|
| IP protection grade (according to EN54-24 / IP Rating) | 21C/32            |
| Enclosure material                                     | ABS               |
| Dimensions   | 330 x 209 x 84 mm |
| Weight   | 1.2 Kg            |
| Colour   | White RAL 9010    |
| Mounting type  | Wall mount        |



## Dimensions

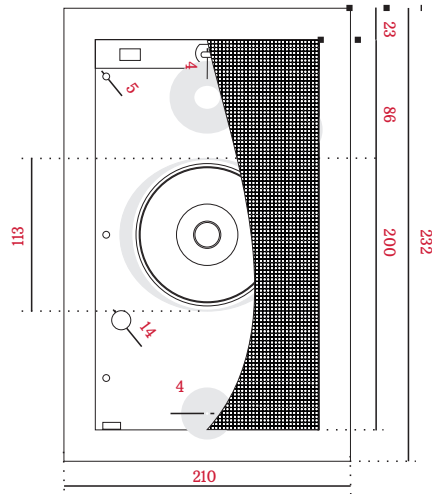

## — ORDER CODE

**WAC 165/6 PP1** 6.5" 6W wall mount loudspeaker



Centobuchi, via Dei Lavoratori 10  
63076, Monteprandone (AP), ITALY  
Tel. +39 0735 705007 \_ Fax +39 0735 704912

info@inim.biz \_ [www.inim.biz](http://www.inim.biz)

Inim distributor's stamp  
and signature